



4 吸盘 S 形真空提升机适用于窄长重物，例如 H 型钢等普通型钢和长钢板、混凝土材料的搬运作业，以及混凝土砌块、U 形槽等 4 点起吊作业。通常情况下请使用 C 形吸盘；吸附面粗糙的材料请使用 R 形吸盘。

规格


型号	项目	起吊负荷 kN	重量 kg	电动机 kW	电压
TVH-U3BS1C10S4		0.588	111	0.2	AC200V (50/60Hz)
TVH-U3BS1C15S4		1.96	116		
TVH-U3BS1C20S4		2.45	117		
TVH-U3BS1C30S4		7.06	133		
TVH-U3BS1R10S4		0.981	111		
TVH-U3BS1R15S4		2.75	115		
TVH-U3BS1R20S4		3.92	119	0.4	AC200V (50/60Hz)
TVH-U3NS1C10S4		0.686	136		
TVH-U3NS1C15S4		2.35	141		
TVH-U3NS1C20S4		2.75	142		
TVH-U3NS1C30S4		8.24	158		
TVH-U3NS1R10S4		1.08	136		
TVH-U3NS1R15S4		3.14	140		
TVH-U3NS1R20S4		4.51	144		



型号记号

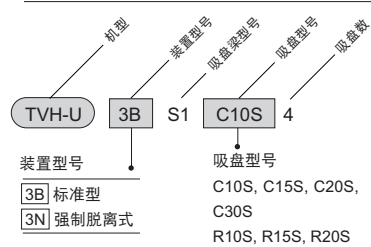

TVH-U

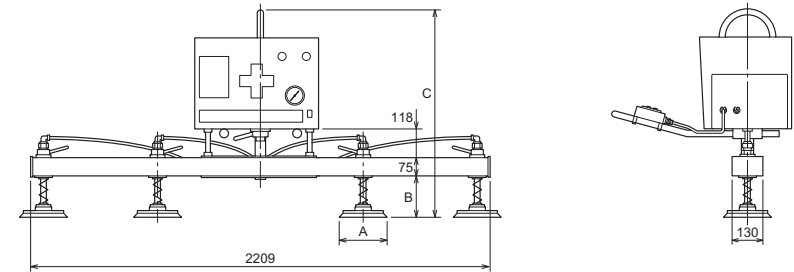

尺寸表

型号	记号	A	B	C
TVH-U3*S1C10S4		φ100	171	842(846)
TVH-U3*S1C15S4		φ165	174	845(849)
TVH-U3*S1C20S4		φ200	174	845(849)
TVH-U3*S1C30S4		φ300	178	849(853)
TVH-U3*S1R10S4		φ154	179	850(854)
TVH-U3*S1R15S4		φ220	179	850(854)
TVH-U3*S1R20S4		φ254	179	850(854)

• () 内为强制脱离式的尺寸。